
## EXTRABLOCK 330 SHADE FABRIC

#### EYE CATCHING COLOURS AND FR RATED OUTDOOR SHADE

# FABRICEXTRABLOCK 330SPECIFICATIONSEXTRABLOCK 330

Shade Factor % ( SF depends on colour - see below for details )		81 - 97
UVR Block %		96 - 98
UPF (UV Protection Factor)		21 - 41
Roll Width		3.0m
FRAS1530.2	Flammability 1, Spread Factor 0, Heat Factor 1	
FR AS1530.3	Ignitability 13, Spread of Flame 7, Heat Evolved 2, Smoke 5	
CSFM	Complies with California State Marshals requirements, Title 19, Section 1237	

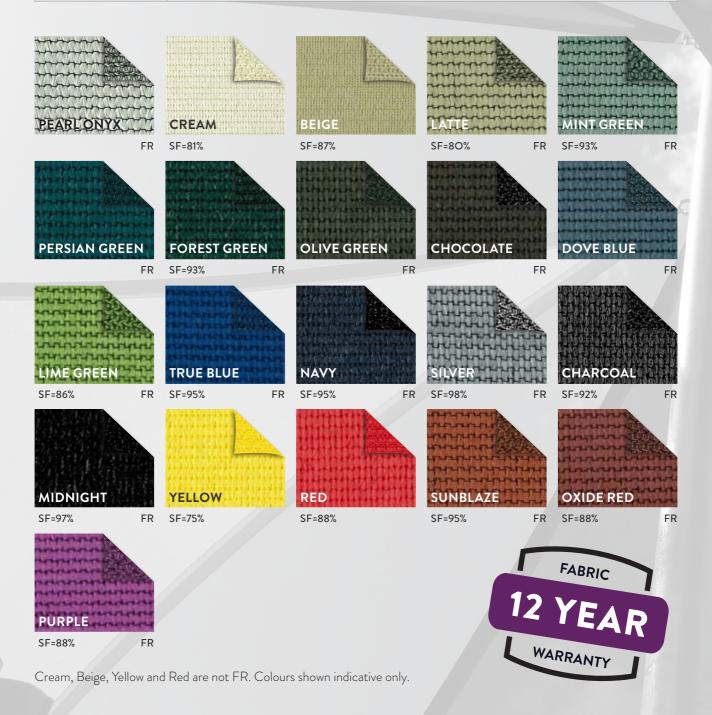

### FEATURES

#### RECYCLABLE

The EXTRABLOCK range of knitted shade fabric has been specifically designed for use in tension structures and shade sails, but performs equally well when used on carpark structures, awnings and umbrellas.

EXTRABLOCK is one of the worlds best FR rated shade cloths. It meets the California State Fire Marshall test for title 19. This is widely recognised as the most difficult FR test to meet and EXTRABLOCK gets a new certificate every year!

EXTRABLOCK is a very dimensionally stable shade cloth with very similar biaxial strengths and extensions in both directions.

EXTRABLOCK has a 12 year warranty against UV breakdown. Peace of mind for you and your clients.

- ✓ High Strength fabric
- Controlled Elongation
- Maximum protection with up to 98% shade
- Excellent Dimensional Stability
- ✓ 12 Year Warranty
- ✓ Fire retardancy rated
- ✓ Heat set (stentered)
- Will not rot or support the development of mould and mildew
- ✓ Breathable, allowing air circulation for cooling



#### **ENGINEERING** SPECIFICATIONS



Breaking Force Warp (AS2001.2.3.2-2001 Grab Method)	979N
Breaking Force Weft (AS2002.3.1-2001)	1228N
Elongation at Break Warp	67%
Elongation at Break Weft	57%
Bursting Strength (AS 2001.2.4-1990)	3000kPa
Tear Resistance Warp (AS2001.2.10-1986)	157N
Tear Resistance Weft (AS2001.2.10-1986)	170N

## EXTRABLOCK 330



AVAILABLE FROM:

© NuRan