

Outdoor awnings, pergolas, curtain & blinds

2020





iZi	01
TERA	08
MUSE	17
HALO	24
HARBOUR	32

T. 1300 552 516 H. www.oztech.com E. info@oztech.com





iZi

Outdoor awnings pergolas, curtain & blinds



Outdoor awnings pergolas, curtain & blinds



The IZI retractable system allows for a flexible solution for an existing timber or steel structure. The system offers a wind rating up to Beaufort class 11 (up to 117km/h) and is designed to stand up to even the worst of conditions rain, hail or shine.

The system is custom manufactured using high grade 6063 extruded aluminium profiles and is finished with thermoset powder coating which provides superior overall performance for exterior applications. All fixings are high grade stainless steel to ensure extended life.




iZi

TECHNICAL DETAILS

Single Module

Width. **2m > 5m** Single module with single motor & 2 rafters


Projection. Max.10m

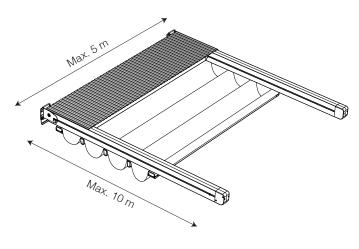

Double Module

Width. **5m > 9m** Double modules with single motor & 3 rafters

Projection. Max.10m

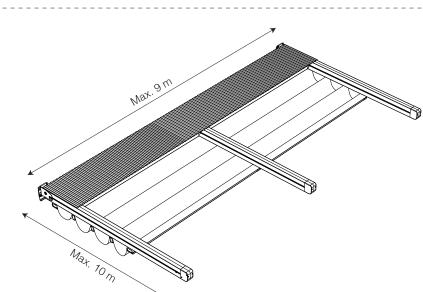


Triple Module Width. 9m > 13m Triple modules with single motor & 4 rafters Projection. Max.10m







iZi


TECHNICAL DETAILS

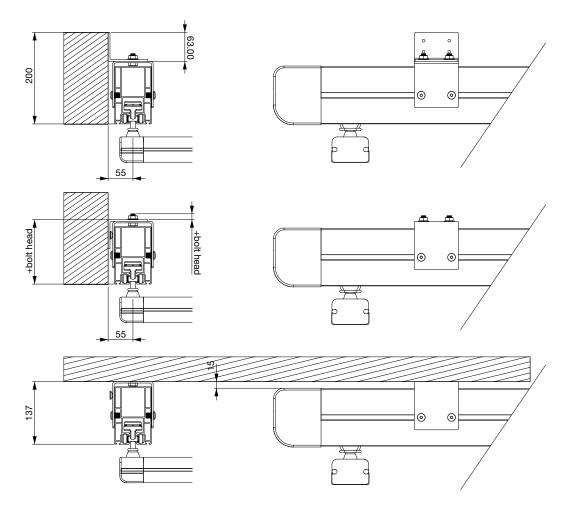


Hang bracket L type









Hang bracket U type












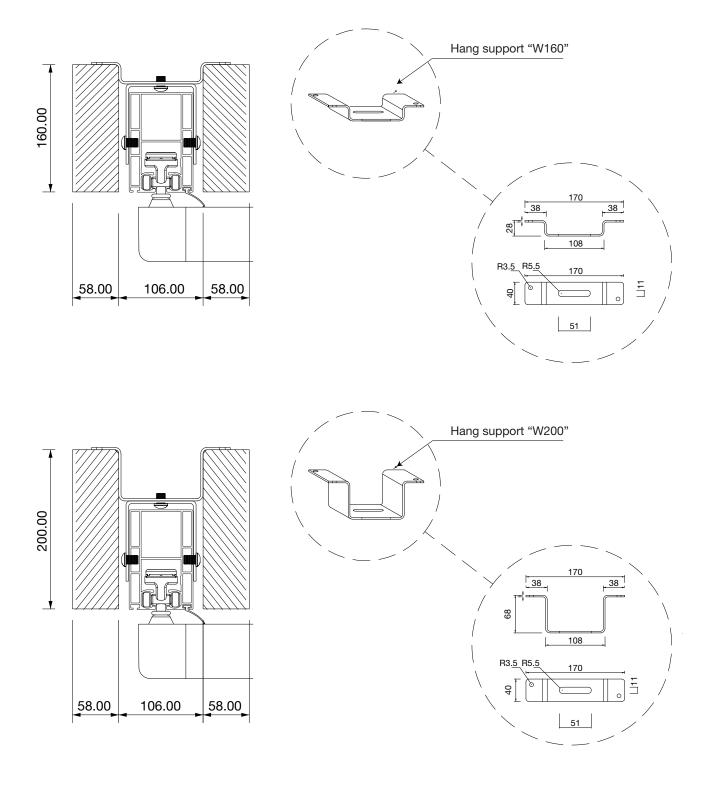




iZi

View direction


A. Width

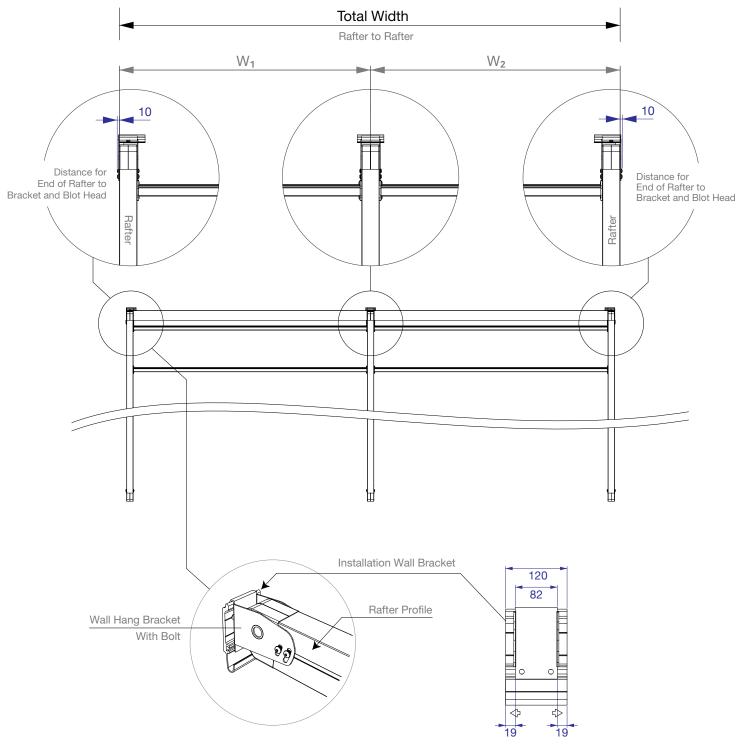

Adjust distance in wall bracket



iZi B. Projection

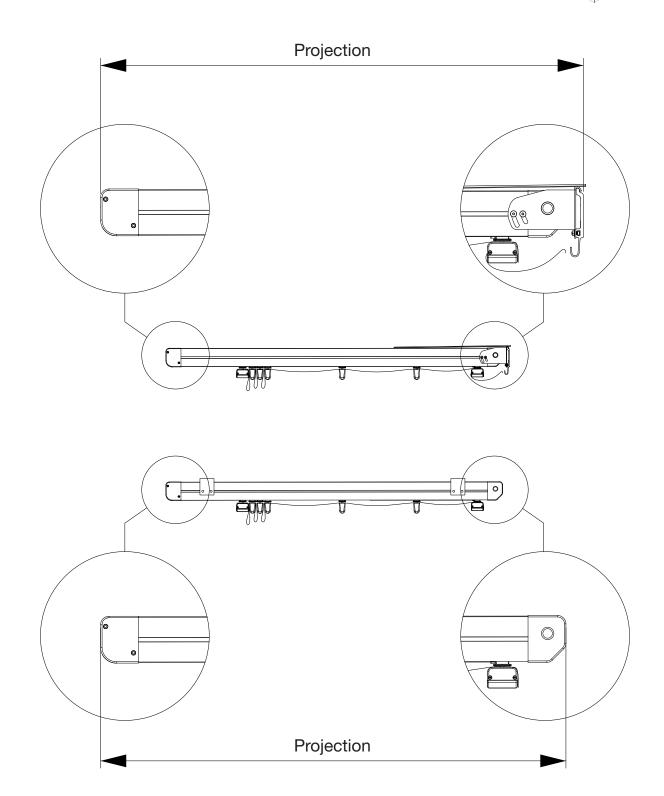









Outdoor awnings pergolas, curtain & blinds



Outdoor awnings pergolas, curtain & blinds


The TERA retractable system provides the user with a designer cover that allows the outdoor area to be used all year round. The system offers a wind rating up to 117km/h and offers protection from the elements.

The system is custom manufactured using high grade 6063 extruded aluminium profiles and is finished with thermoset powder coating which provides superior overall performance for exterior applications. All fixings are high grade stainless steel to ensure extended life.





TECHNICAL DETAILS

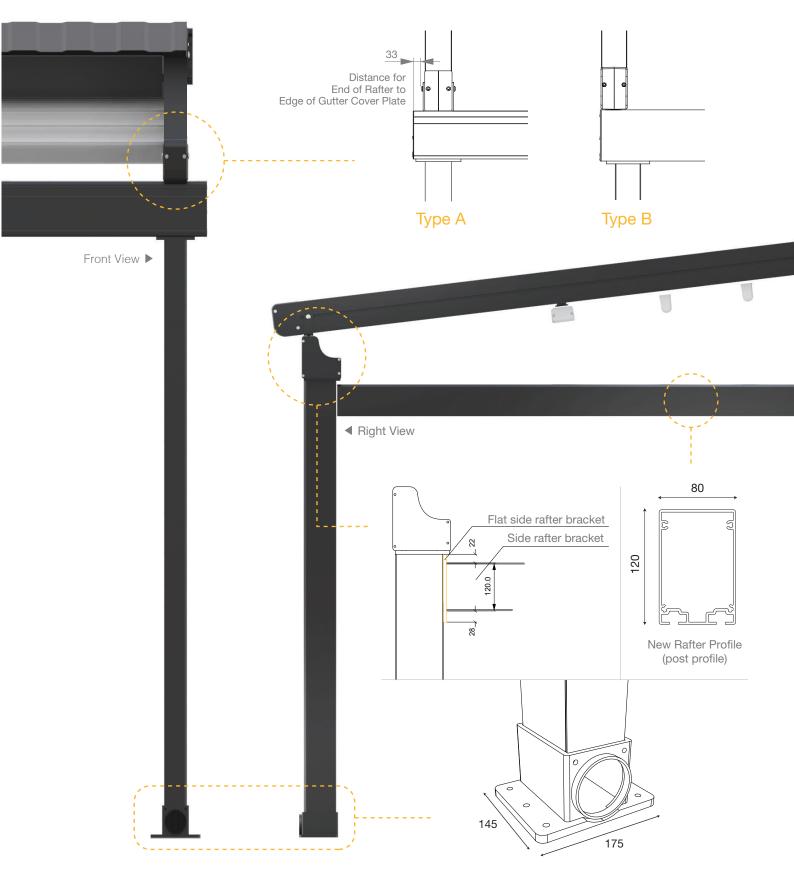




TECHNICAL DETAILS

Single Module

Width. **2m > 5m** Single module with single motor & 2 rafters


Projection. Max.10m



Double Module

Width. **5m > 9m** Double modules with single motor & 3 rafters

Projection. Max.10m




Triple Module

Width. 9m > 13mTriple modules with


single motor & 4 rafters

Projection. Max.10m

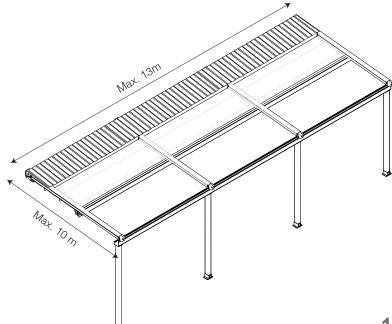




TECHNICAL DETAILS

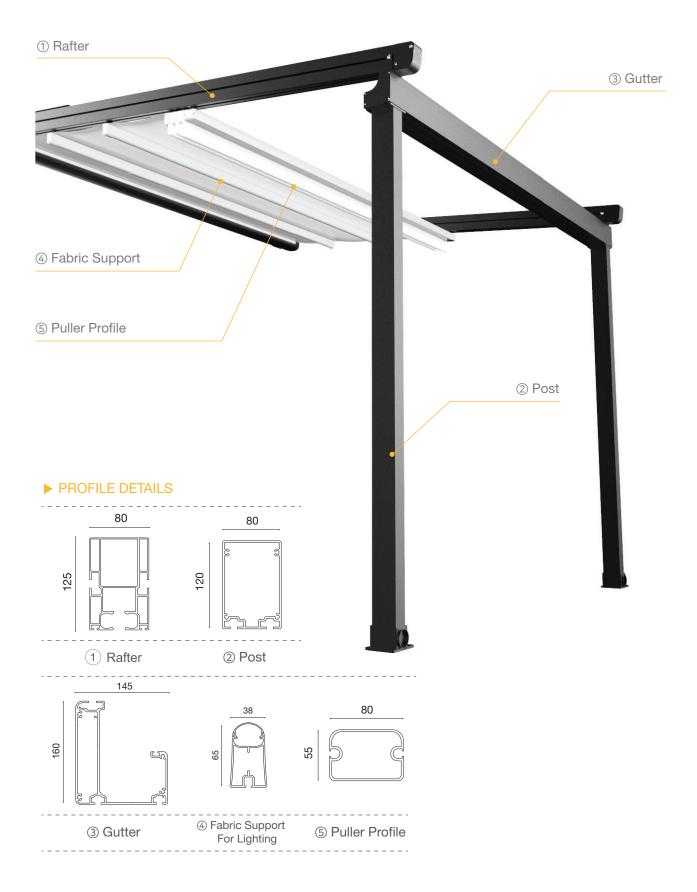







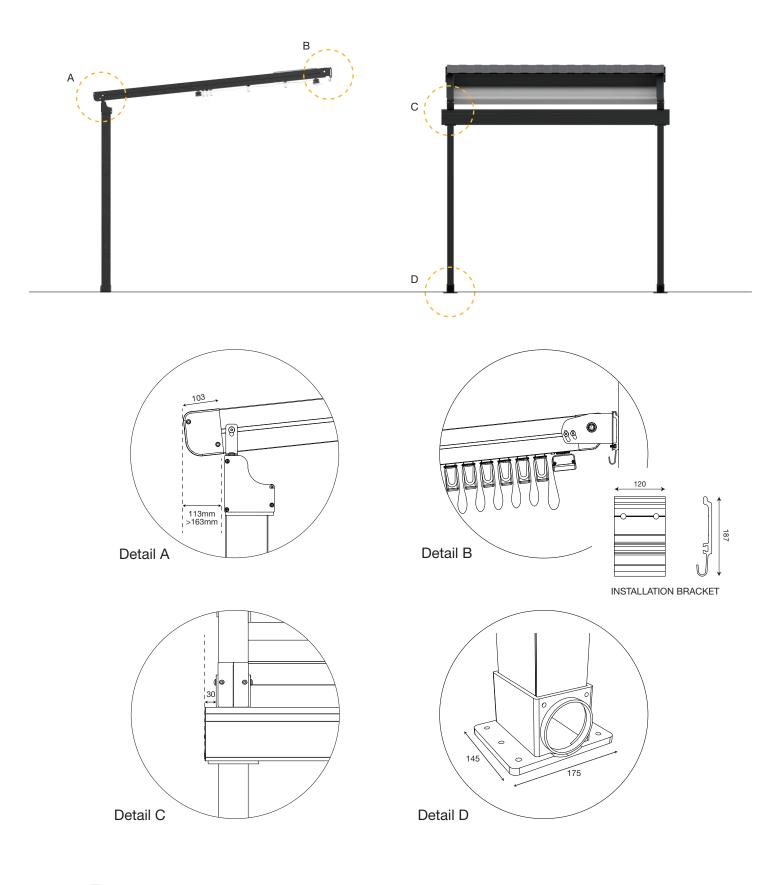



A. Width




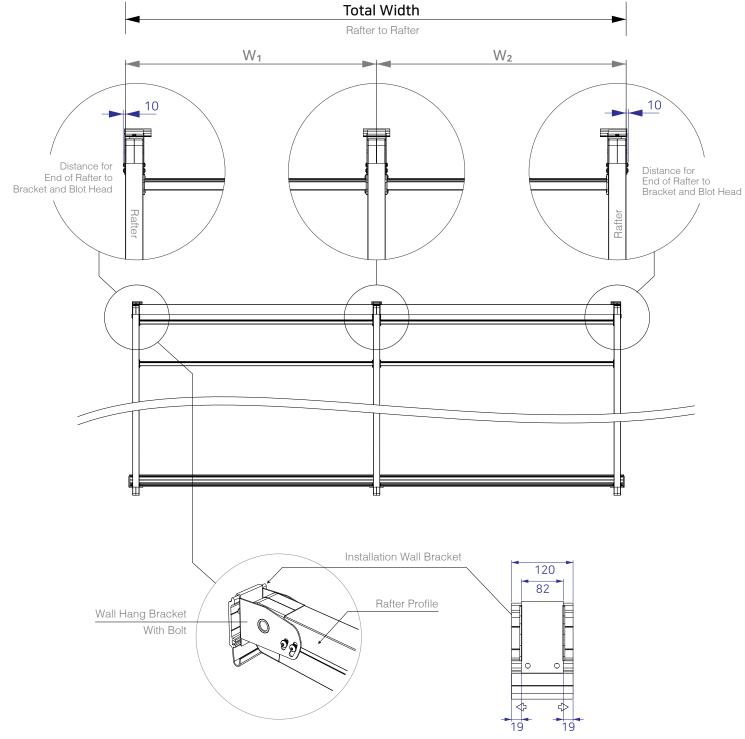


Adjust distance in wall bracket



A. Width




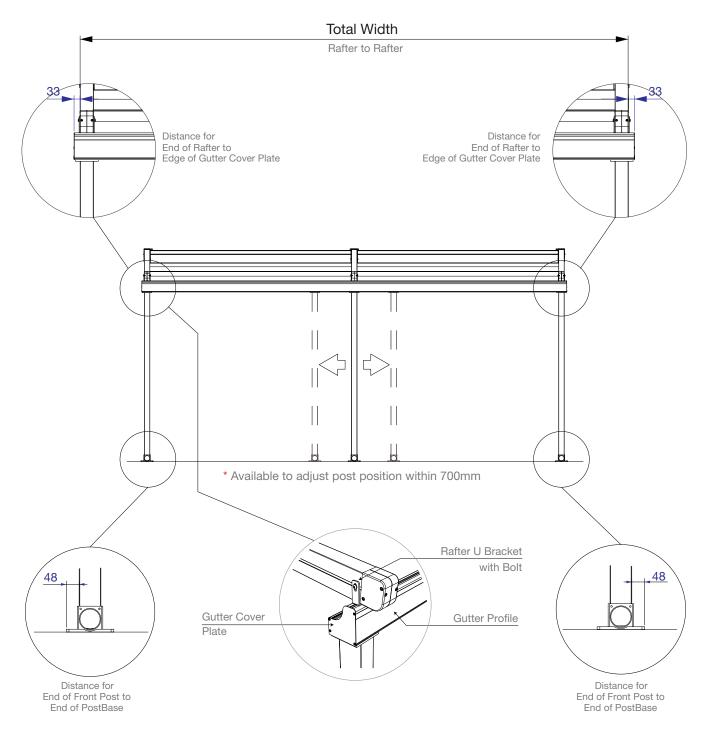






B. Projection & Height



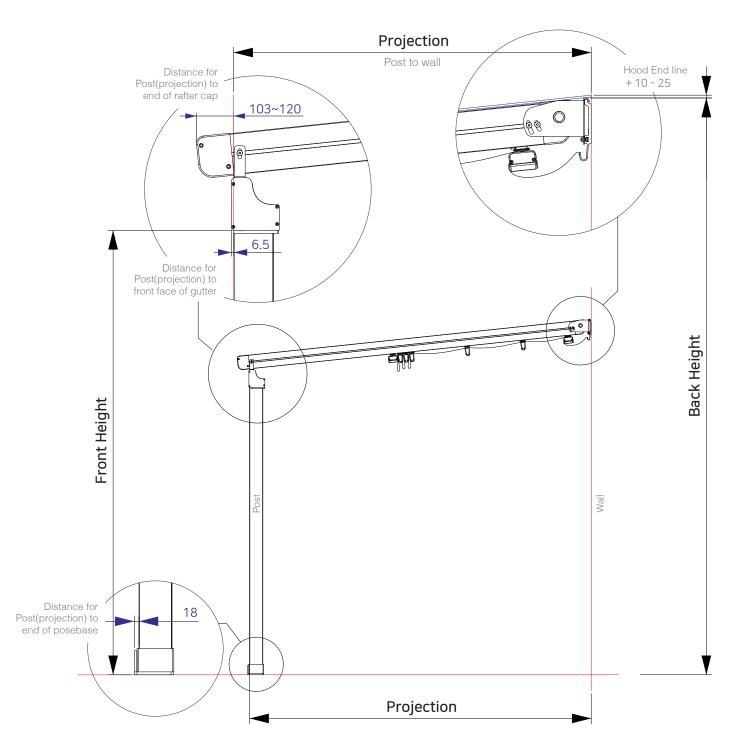



C. Angle

TERA	2.0 M	fall	2.5 M	fall	3.0 M	fall	3.5 M	fall	4.0 M	fall	4.5 M	fall	5.0 M	fall
2.0 M	2.7 °	379	3.5 °	407	4.5 °	442	5.0 °	460	5.7 °	485	6.0 ^o	495	7.0 °	531
3.0 M	2.7 °	426	3.5 °	468	4.5 °	521	5.0 °	547	5.7 °	584	6.0 °	600	7.0 °	653
4.0 M	2.7 °	474	3.5 °	530	4.5 °	600	5.0 °	635	5.7 °	684	6.0 °	705	7.0 °	776
5.0 M	3.4 °	585	4.5 °	679	5.5 °	766	6.0 ^o	811	6.0 °	811	6.5 °	855	7.5 °	943
6.0 M	3.4 °	645	4.5 °	757	5.5 °	863	6.0 ^o	916	6.0 °	916	7.5 °	1075	8.5 °	1182
7.0 M	3.4 °	705	4.5 °	836	5.5 °	959	6.0 ^o	1021	7.0 °	1144	7.5 °	1207	8.5 °	1331
8.0 M	4.5°	915	5.5 °	1055	6.5 °	1196	7.0 ^o	1267	7.0 °	1267	9.0 °	1552	10.0 °	1696
9.0 M	4.5 °	993	5.5 °	1152	6.5 °	1310	7.0 ^o	1390	8.0 °	1550	9.0 °	1710	10.0 °	1872
10.0 M	4.5 °	1072	5.5 °	1248	6.5 °	1424	7.0 °	1513	8.0 °	1690	9.0 °	1869	10.0 °	2048

If lesser pitch than above table is required, please contact our staff for more details.







Outdoor awnings pergolas, curtain & blinds



Outdoor awnings pergolas, curtain & blinds

The MUSE retractable system provides an elegant outdoor shade system which can be integrated with a timber finish to give it a natural look.

The system is custom manufactured using high grade 6063 extruded aluminium profiles and is finished with thermoset powder coating which provides superior overall performance for exterior applications. All fixings are high grade stainless steel to ensure extended life.



TECHNICAL DETAILS

Max.5m

Single Module

Width. **2m > 5m** Single module with single motor & 2 rafters

Projection. Max.5m

Double Module

Width. **5m > 9m** Double modules with single motor & 3 rafters

Projection. Max.5m

Triple Module Width. 9m > 13m

Triple modules with

single motor & 4 rafters

Projection. Max.5m

Mat. 5m Max.9m Mat. 5 m Max. 13m Q Mat. 5 m X




TECHNICAL DETAILS







TECHNICAL DETAILS

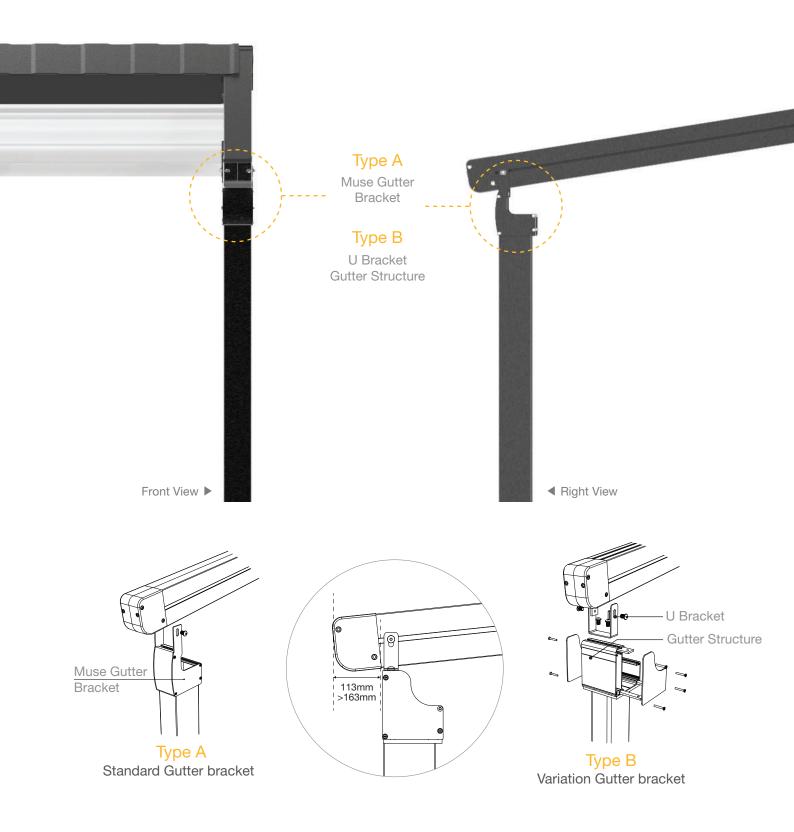



A. Width




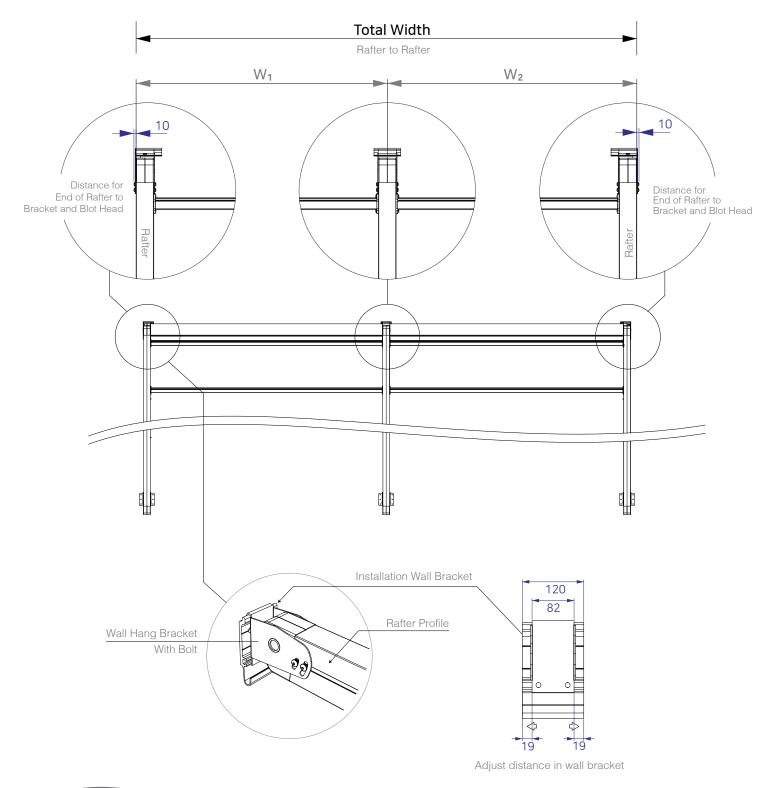







A. Width



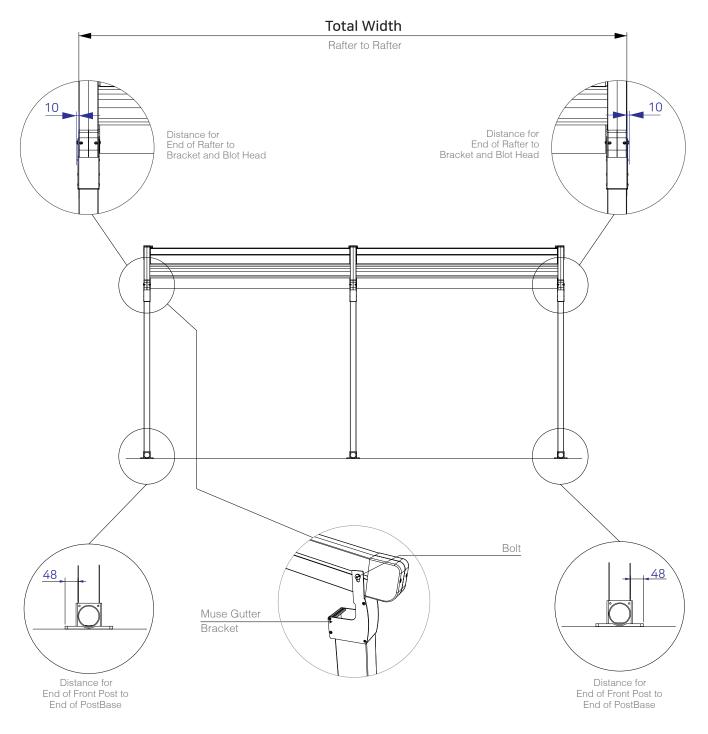




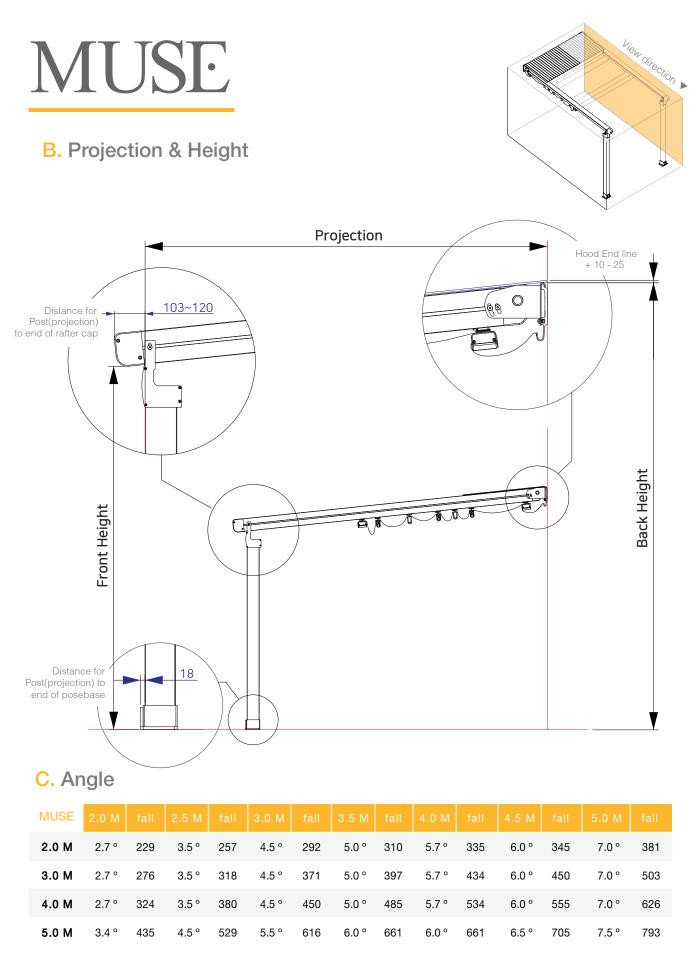

If lesser pitch than above table is required, please contact our staff for more details.





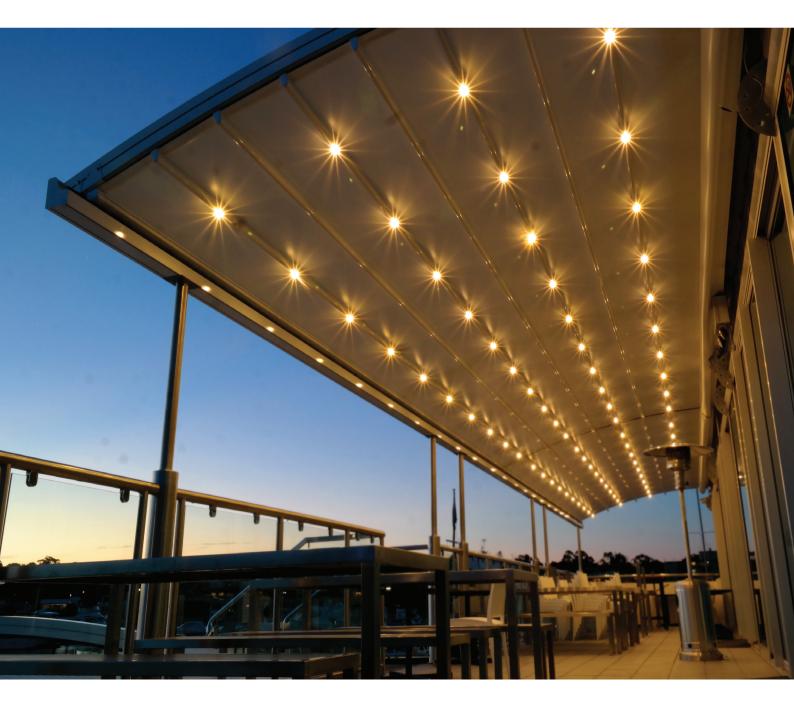

I·IALO

Outdoor awnings pergolas, curtain & blinds



Outdoor awnings pergolas, curtain & blinds

The Halo retractable system provides a stylish architectural covering which


allows large outdoor areas to be used under all weather conditions.

The system is custom manufactured using high grade 6063 extruded aluminium profiles and is finished with thermoset powder coating which provides superior overall performance for exterior applications. All fixings are high grade stainless steel to ensure extended life.



HALO

TECHNICAL DETAILS

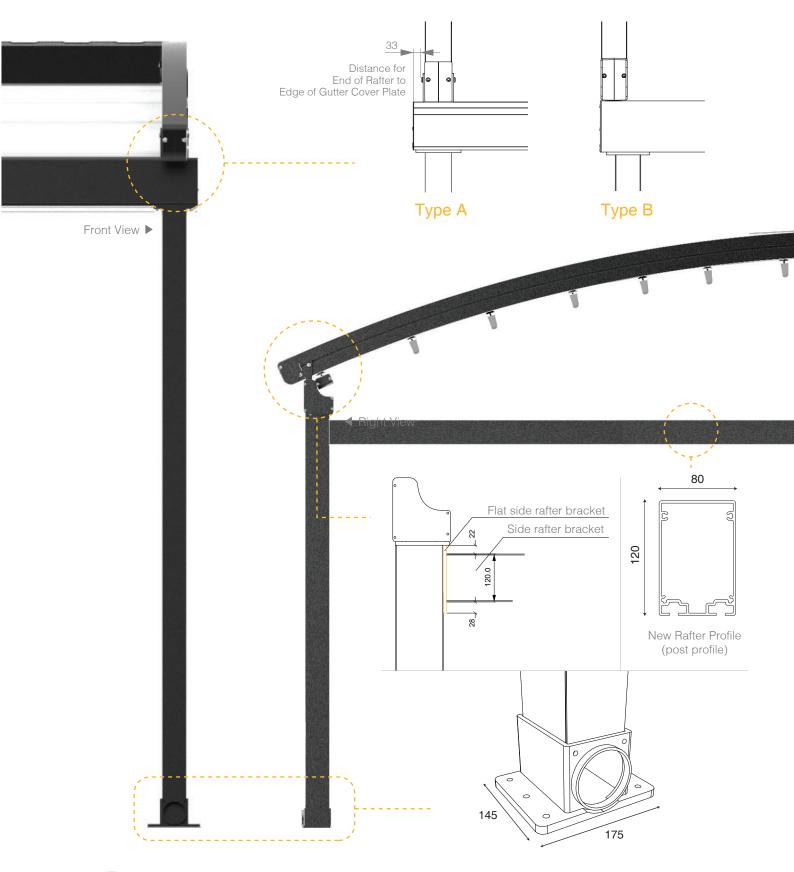



I·IALO

TECHNICAL DETAILS

Single Module


Width. 2m > 5m Single module with single motor & 2 rafters

Projection. Max.10m

Double Module Width. 5m > 9m

Projection. Max.10m

Double modules with single motor & 3 rafters

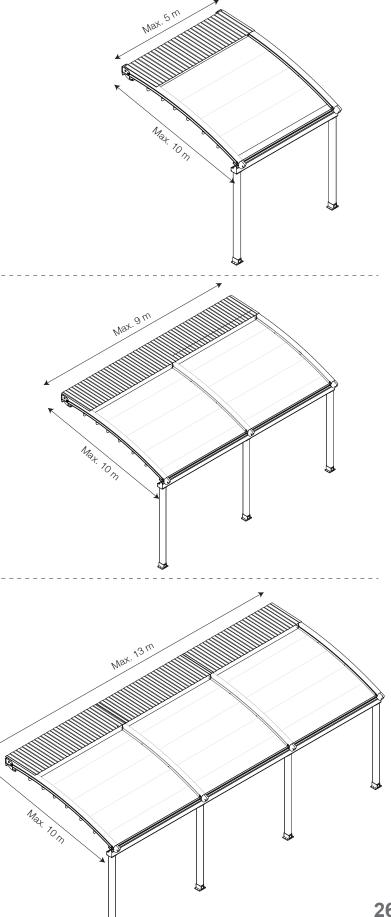

Triple Module

Width. 9m > 13m Triple modules with single motor & 4 rafters

Projection. Max.10m



26


I·IALO

TECHNICAL DETAILS






HALO

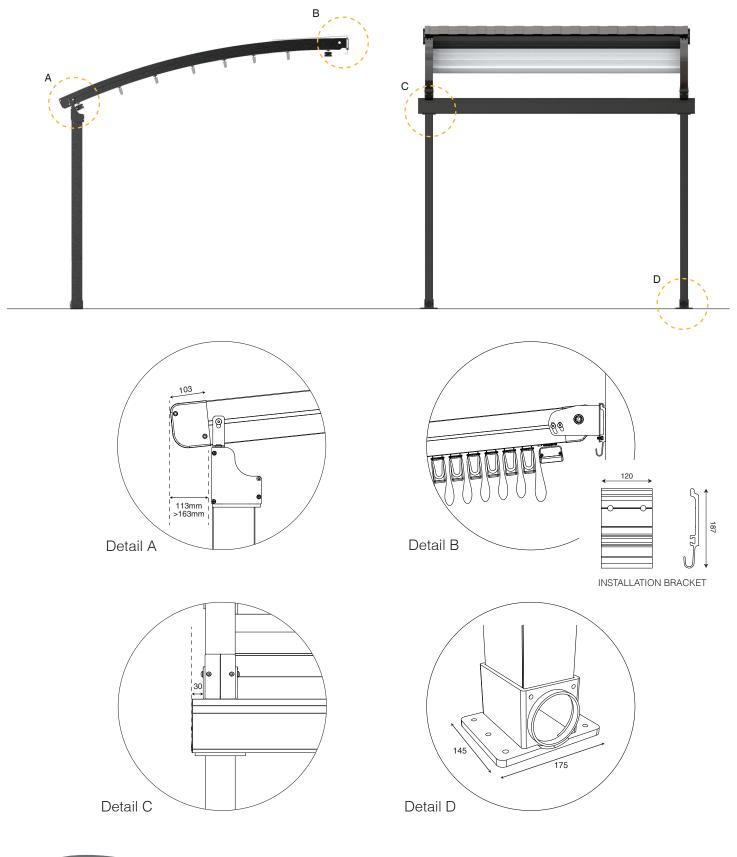




I·IALO

A. Width



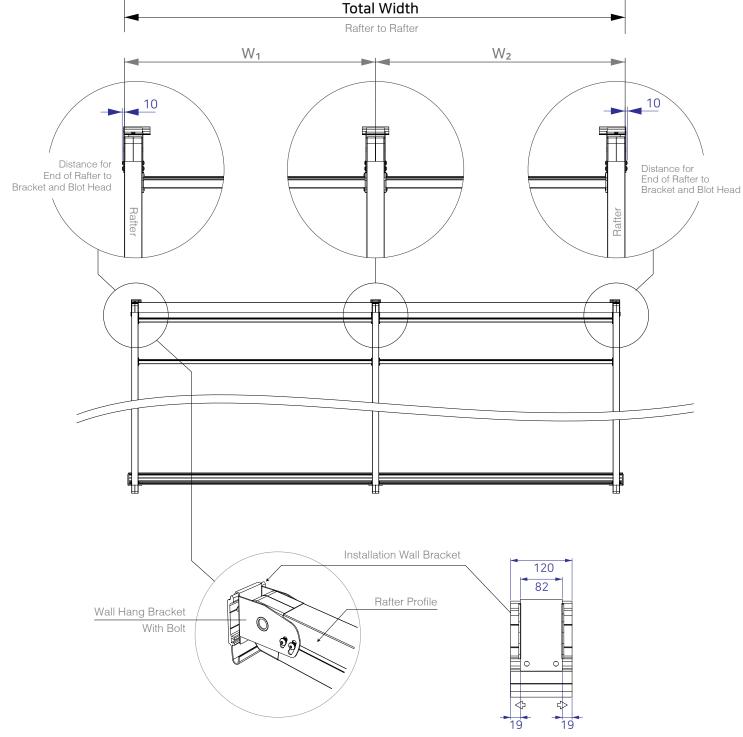



Adjust distance in wall bracket




I·IALO

A. Width



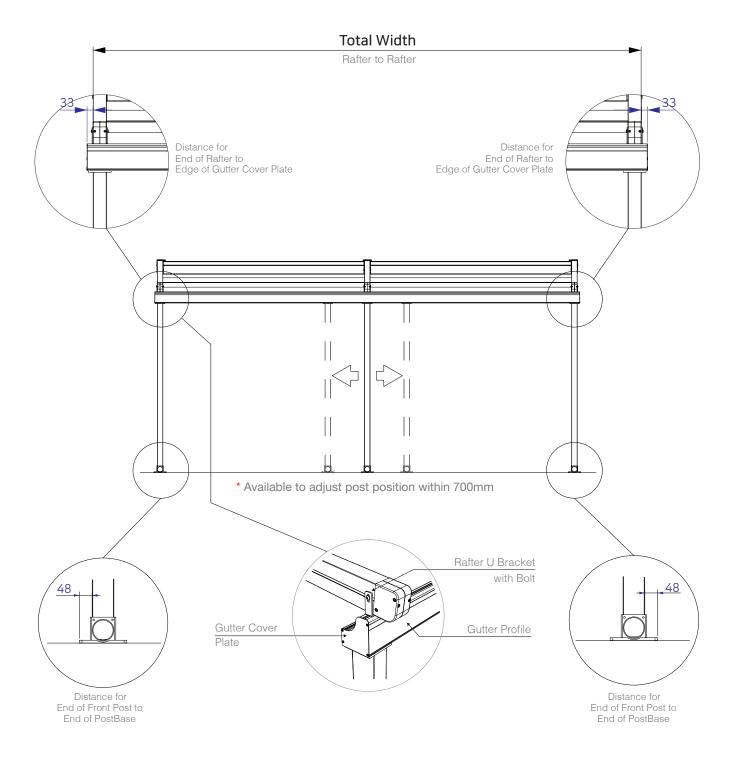



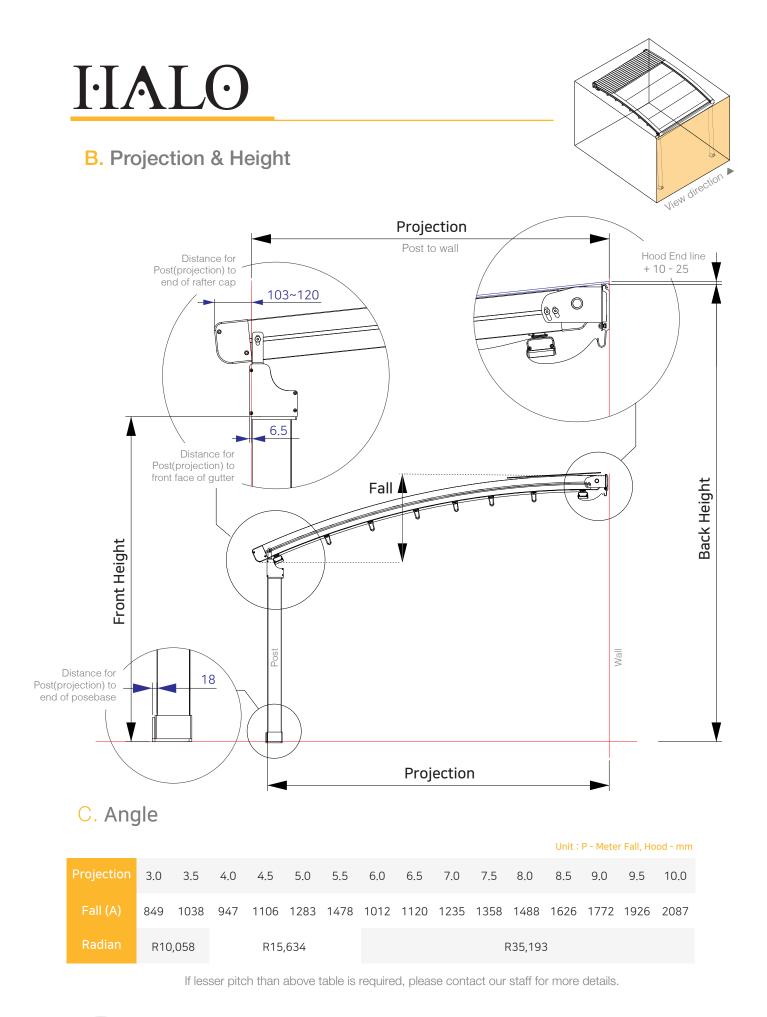







Outdoor awnings pergolas, curtain & blinds



Outdoor awnings pergolas, curtain & blinds






TECHNICAL DETAILS

Single Module

2m > 5m Single module with single motor & 2 rafters




Projection HARBOUR - Max. 7 m HARBOUR **PLUS** - Max. 10 m

Double Module

5m > 9m

Double module with single motor & 3 rafters

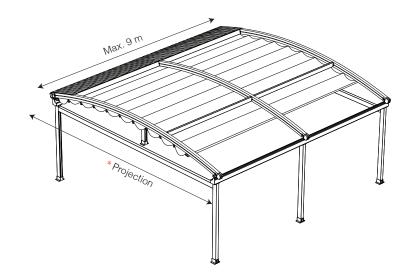

* Projection HARBOUR - Max. 7 m HARBOUR **PLUS** - Max. 10 m

Triple Module


9m > 13m

Triple module with Single motor & 4 rafters


Projection


HARBOUR - Max. 7 m HARBOUR **PLUS** - Max. 10 m



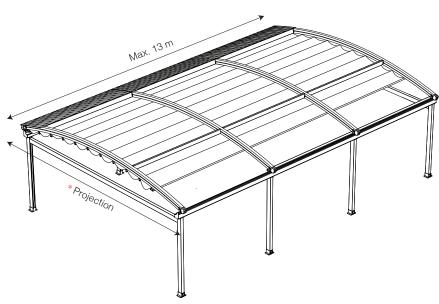



TECHNICAL DETAILS

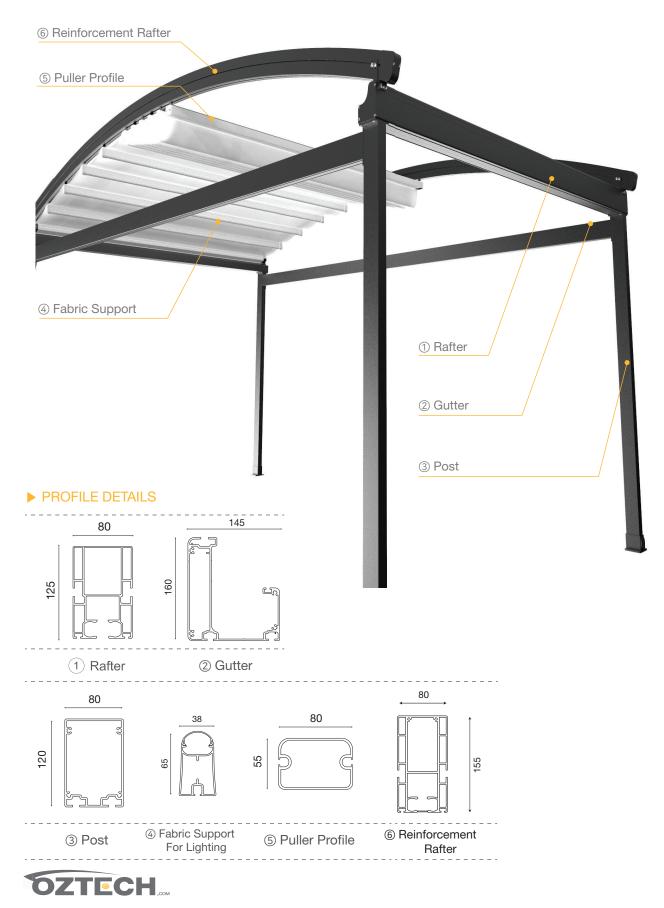


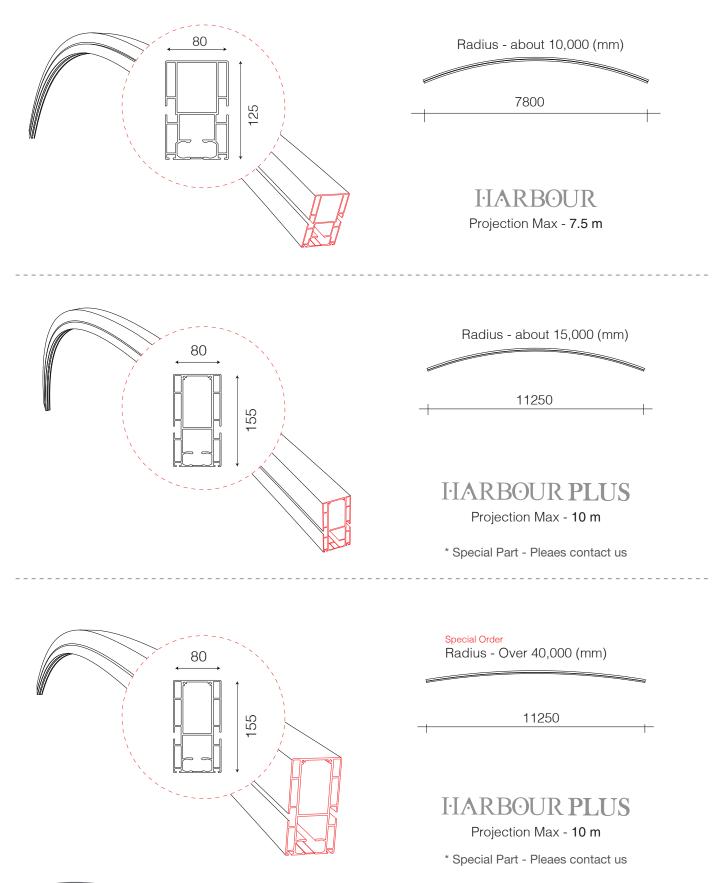





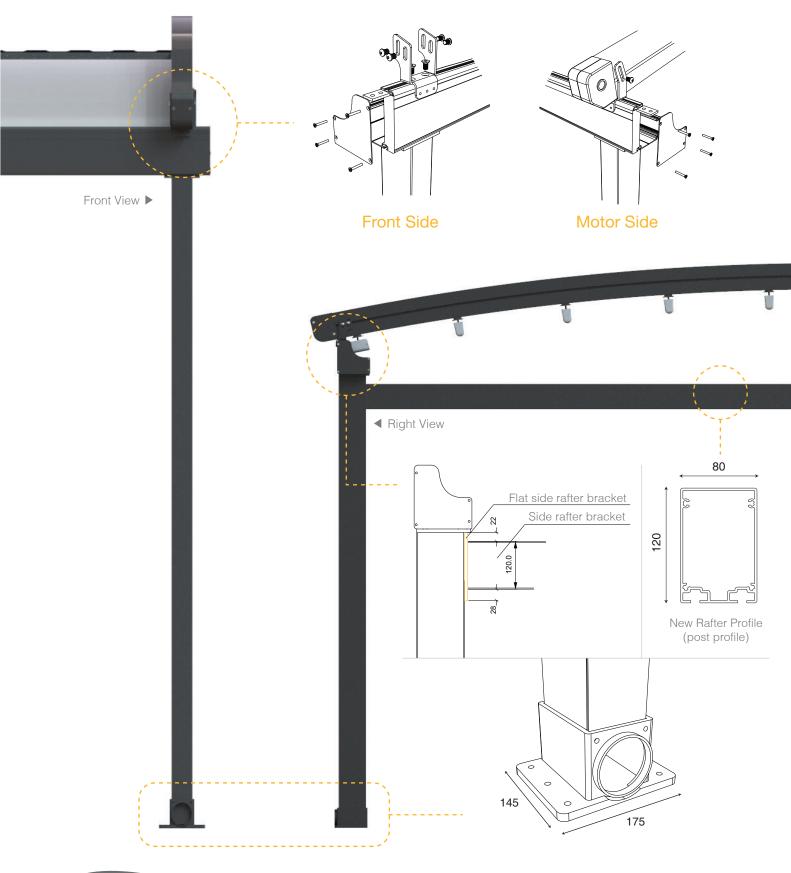

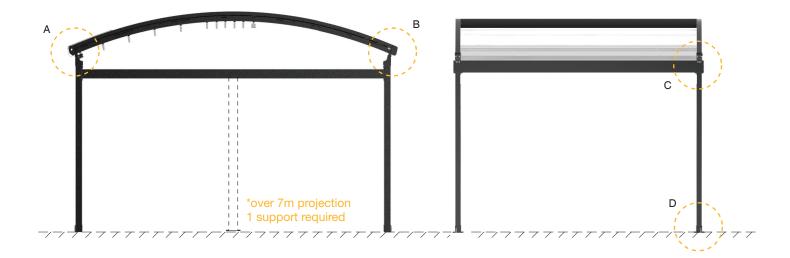









Back cover for Harbour system












A. Width



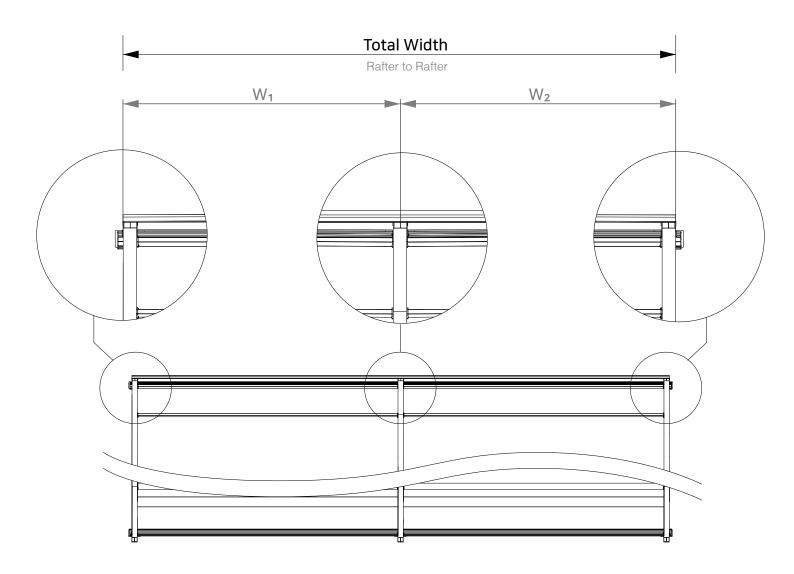



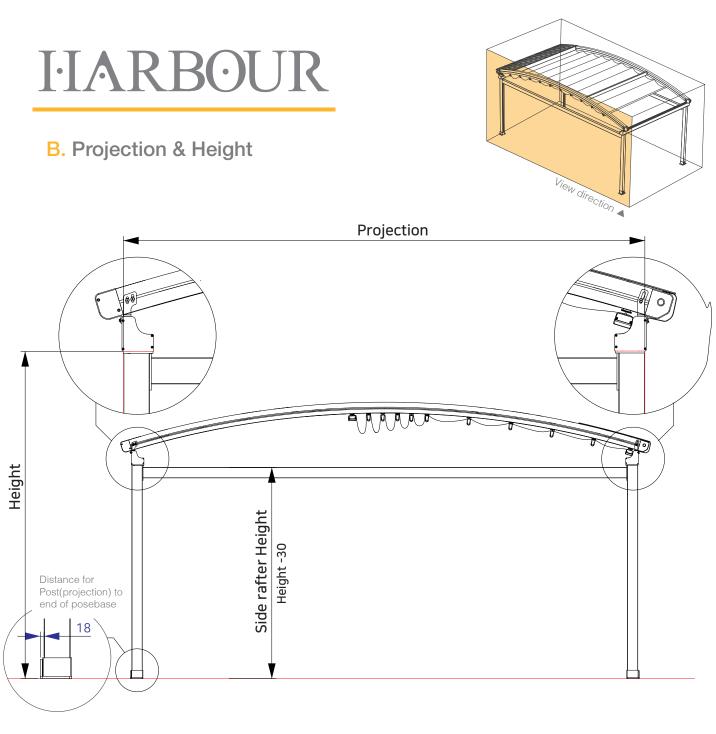

B. ANGLE

	<				HARE	BOUR	Unit : P - Meter Fall, Hood - mm								
Projection	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0
Fall (A)	398	438	486	540	601	668	748	825	914	741	805	874	1024	947	1106

If lesser pitch than above table is required, please contact our staff for more details.







H. www.oztech.com E. info@oztech.com

Т. 1300 552 516